



(43) International Publication Date
7 April 2005 (07.04.2005)

PCT

(10) International Publication Number
WO 2005/031109 A1


- (51) **International Patent Classification⁷:** E21B 7/28. (81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) **International Application Number:** PCT/CA2003/001436
- (22) **International Filing Date:** 30 September 2003 (30.09.2003)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** DRAG'N SKIN INTERNATIONAL INC. [CA/CA]; R.R. #1, Westlock, Alberta T7P 2N9 (CA).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** JARVIS, Darrel [CA/CA]; Box 243, Clyde, Alberta T0G 0P0 (CA).
- O'BRIEN, Alan [CA/CA]; R.R. #1, Westlock, Alberta T7P 2N9 (CA).
- (74) **Agents:** GARWASIUK, Helen et al.; Smart & Biggar, 1501 - 10060 Jasper Avenue, Scotia Place, Tower Two, Edmonton, Alberta T5J 3R8 (CA).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A PIPE ASSEMBLY AND A METHOD FOR INSTALLATION IN A BOREHOLE

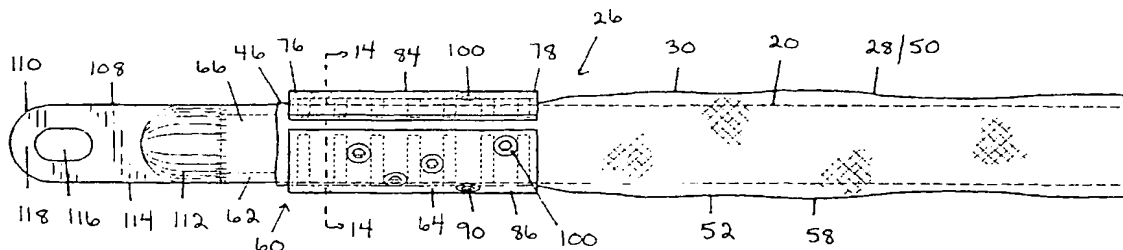

(57) Abstract: A method for installing a pipe in a borehole and a pipe assembly for installation are provided which reduce the likelihood of any damage to the pipe during installation. The method for installing the pipe in the borehole includes: advancing a running device through the borehole from a proximal end toward a distal end; connecting a pipe assembly with the running device from the distal end, the pipe assembly including the pipe and a flexible sleeve surrounding the pipe; retracting the running device through the borehole toward the proximal end so that the pipe assembly moves toward the proximal end; and disconnecting the pipe assembly from the running device. The pipe assembly includes a pipe having a protective coating and a flexible sleeve surrounding the pipe comprised of a continuous length of a flexible sleeve material. The flexible sleeve may be comprised of a length of a hose.